
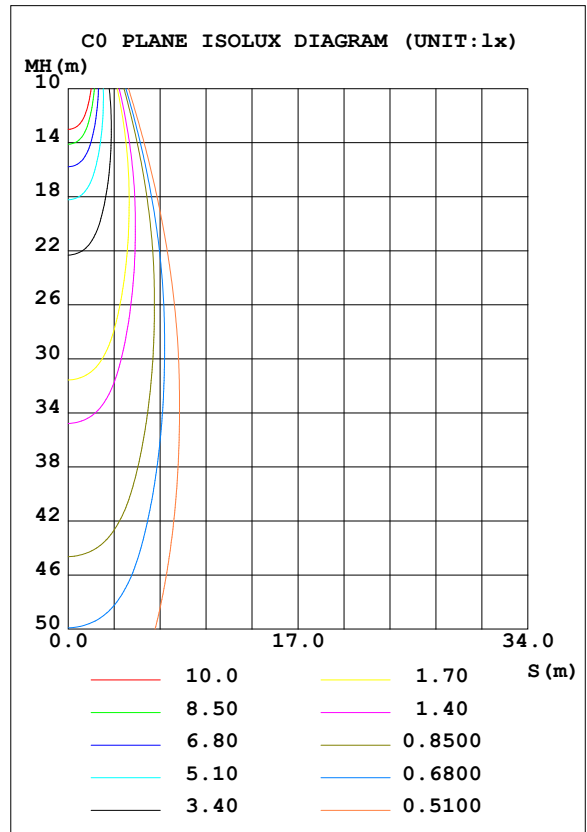


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: MT26-F62	TYPE:	WEIGHT:
SPEC.: black RA90	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 57.01 lm/W			
MODEL	4000K	I _{max} (cd)	1714	S/MH (C0/180)	0.35
NOMINAL POWER (W)	6	LOR (%)	100.0	S/MH (C90/270)	0.42
RATED VOLTAGE (V)	220-240	TOTAL FLUX (lm)	333.68	η UP, DN (C0-180)	0.0, 48.9
NOMINAL FLUX (lm)	333.68	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 51.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	220	η down (%)	100.0	CIBSE SHR MAX	1.00

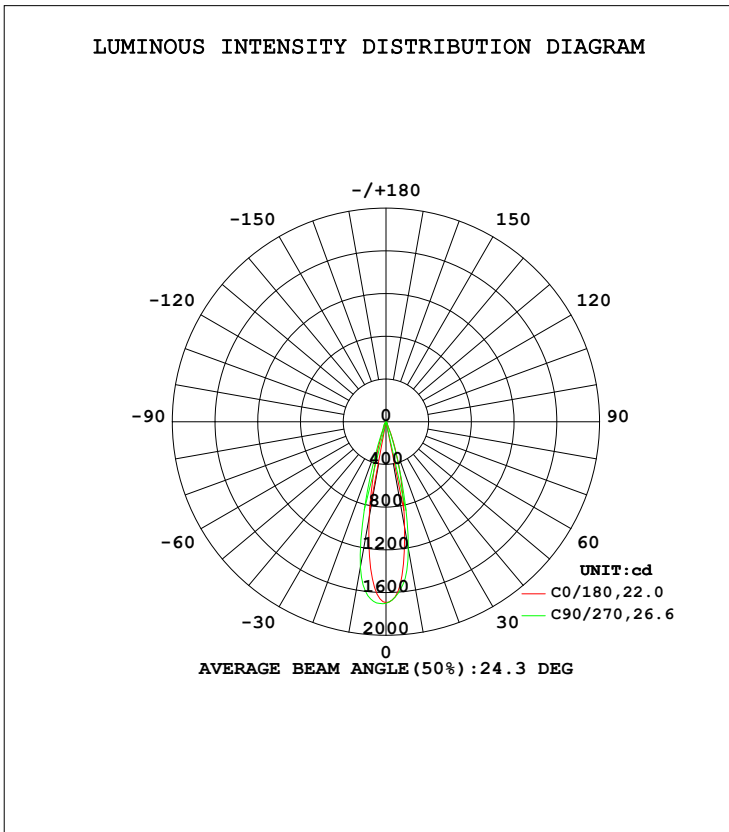

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.450m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1005	1038	1207	1126	908.9	1009	1383	1378	0- 10	135.6	135.6	40.6, 40.6
20	202.3	179.7	168.1	134.6	92.91	107.3	165.3	180.7	10- 20	147.5	283.1	84.8, 84.8
30	28.70	22.06	28.07	26.65	32.56	25.73	45.49	30.00	20- 30	26.63	309.7	92.8, 92.8
40	19.68	12.21	17.90	12.92	15.00	9.577	18.27	13.68	30- 40	14.10	323.8	97.1, 97.1
50	7.429	4.919	6.711	4.641	4.651	4.078	5.936	5.451	40- 50	7.387	331.2	99.3, 99.3
60	0.9568	0.7203	0.7288	0.5543	0.3387	0.4154	0.5612	0.6228	50- 60	2.281	333.5	99.9, 99.9
70	0.0119	0.0003	0.0041	0.0001	0	0	0	0	60- 70	0.1676	333.7	100, 100
80	0	0	0	0	0	0	0	0	70- 80	0.0001	333.7	100, 100
90	0	0	0	0	0	0	0	0	80- 90	0	333.7	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: UT16-TD68	TYPE:	WEIGHT:
SPEC.: black RA90 2700K+6000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:

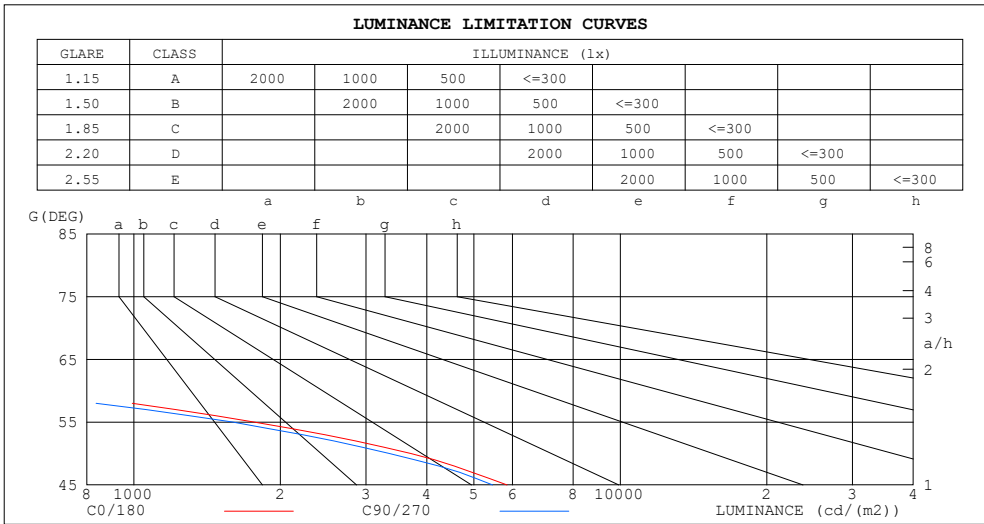

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	11	4
65	138	112
60	613	467
55	1765	1596
50	3704	3346
45	5851	5463


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: UT16-TD68	TYPE:	WEIGHT:
SPEC.: black RA90 2700K+6000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.13	1.11	1.10	1.11	1.09	1.08	1.07	1.06	1.05	1.03	1.02	1.01	.00	.99	.99	.97
2.0	1.08	1.05	1.03	1.06	1.04	1.01	1.03	1.01	.99	1.00	.99	.97	.98	.96	.95	.94
3.0	1.04	1.00	.97	1.02	.99	.97	.00	.97	.95	.98	.95	.94	.95	.94	.92	.91
4.0	.00	.96	.93	.99	.95	.92	.97	.94	.91	.95	.92	.90	.93	.91	.89	.88
5.0	.96	.92	.89	.95	.92	.89	.94	.91	.88	.92	.90	.88	.91	.89	.87	.86
6.0	.93	.89	.86	.93	.89	.86	.91	.88	.85	.90	.87	.85	.89	.86	.84	.83
7.0	.90	.86	.84	.90	.86	.83	.89	.85	.83	.88	.85	.83	.87	.84	.82	.81
8.0	.88	.84	.81	.87	.84	.81	.87	.83	.81	.86	.83	.80	.85	.82	.80	.79
9.0	.86	.82	.79	.85	.81	.79	.84	.81	.79	.84	.81	.78	.83	.80	.78	.77
10.0	.83	.80	.77	.83	.79	.77	.82	.79	.77	.82	.79	.77	.81	.78	.76	.76

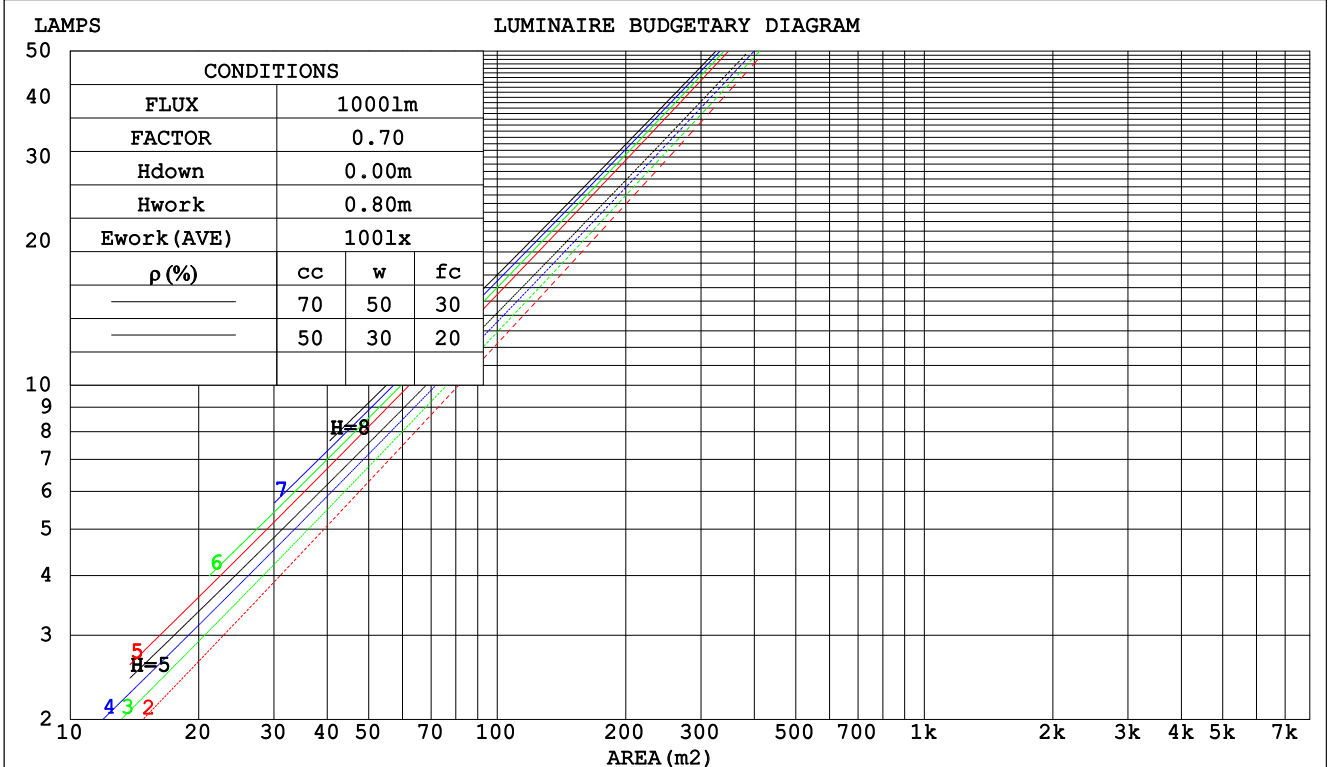

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: UT16-TD68	TYPE:	WEIGHT:
SPEC.: black RA90 2700K+6000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.133	.076	.024	.127	.072	.023	.114	.066	.021	.103	.059	.019	.093	.054	.017	
2.0	.123	.068	.021	.118	.065	.020	.108	.060	.019	.099	.055	.017	.090	.051	.016	
3.0	.115	.061	.018	.110	.059	.018	.102	.055	.017	.094	.052	.016	.087	.048	.015	
4.0	.107	.056	.016	.104	.054	.016	.097	.051	.015	.090	.048	.015	.084	.046	.014	
5.0	.101	.051	.015	.098	.050	.015	.092	.048	.014	.086	.045	.014	.081	.043	.013	
6.0	.095	.048	.014	.093	.047	.013	.087	.045	.013	.083	.043	.013	.078	.041	.012	
7.0	.090	.045	.013	.088	.044	.012	.083	.042	.012	.079	.041	.012	.075	.039	.011	
8.0	.086	.042	.012	.084	.041	.012	.080	.040	.011	.076	.039	.011	.073	.037	.011	
9.0	.082	.040	.011	.080	.039	.011	.077	.038	.011	.073	.037	.011	.070	.036	.010	
10.0	.078	.038	.010	.077	.037	.010	.074	.036	.010	.071	.035	.010	.068	.034	.010	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.148	.144	.135	.128	.098	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.150	.133	.118	.128	.114	.102	.088	.079	.071	.051	.046	.042	.016	.015	.014	
3.0	.135	.113	.096	.115	.098	.083	.079	.068	.059	.046	.040	.034	.015	.013	.011	
4.0	.122	.098	.079	.105	.085	.069	.072	.059	.049	.042	.035	.029	.013	.011	.009	
5.0	.111	.085	.066	.096	.074	.058	.066	.052	.041	.038	.030	.024	.012	.010	.008	
6.0	.102	.075	.056	.088	.065	.049	.061	.046	.035	.035	.027	.021	.011	.009	.007	
7.0	.094	.067	.048	.081	.058	.042	.056	.041	.030	.033	.024	.018	.011	.008	.006	
8.0	.088	.060	.041	.076	.052	.036	.052	.037	.026	.030	.022	.015	.010	.007	.005	
9.0	.082	.055	.036	.071	.047	.031	.049	.033	.022	.029	.020	.013	.009	.006	.004	
10.0	.077	.050	.032	.066	.043	.028	.046	.030	.020	.027	.018	.012	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: UT16-TD68	TYPE:	WEIGHT:
SPEC.: black RA90 2700K+6000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.1	11.7	11.3	11.9	12.0	12.4	13.0	12.6	13.1	13.3
3H	11.0	11.6	11.2	11.7	11.9	12.2	12.8	12.4	13.0	13.2
4H	10.9	11.5	11.2	11.7	11.9	12.1	12.7	12.4	12.9	13.1
6H	10.8	11.3	11.1	11.6	11.8	12.0	12.6	12.3	12.8	13.0
8H	10.8	11.3	11.1	11.5	11.8	12.0	12.5	12.3	12.8	13.0
12H	10.7	11.2	11.0	11.5	11.7	12.0	12.4	12.3	12.7	13.0
4H 2H	10.9	11.5	11.2	11.7	11.9	12.2	12.7	12.4	12.9	13.1
3H	10.8	11.3	11.1	11.5	11.8	12.0	12.5	12.3	12.7	13.0
4H	10.7	11.1	11.0	11.4	11.7	11.9	12.3	12.2	12.6	12.9
6H	10.6	11.0	10.9	11.3	11.6	11.8	12.2	12.1	12.5	12.8
8H	10.5	10.9	10.9	11.2	11.6	11.7	12.1	12.1	12.4	12.8
12H	10.5	10.8	10.9	11.2	11.6	11.7	12.0	12.1	12.4	12.8
8H 4H	10.5	10.9	10.9	11.2	11.6	11.7	12.1	12.1	12.4	12.8
6H	10.4	10.7	10.8	11.1	11.5	11.6	11.9	12.0	12.3	12.7
8H	10.3	10.6	10.8	11.0	11.5	11.6	11.8	12.0	12.2	12.7
12H	10.3	10.5	10.7	11.0	11.4	11.5	11.7	12.0	12.2	12.6
12H 4H	10.5	10.8	10.9	11.2	11.6	11.7	12.0	12.1	12.4	12.8
6H	10.3	10.6	10.8	11.0	11.5	11.6	11.8	12.0	12.2	12.7
8H	10.3	10.5	10.7	11.0	11.4	11.5	11.7	12.0	12.2	12.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.9 / - 7.6					+ 2.6 / - 8.4				
1.5H	+ 4.4 / - 6.0					+ 2.9 / - 5.8				
2.0H	+ 6.9 / -15.9					+ 5.6 / -17.2				

CIE Pub.117, 333.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.8)
 Area: 0.00312 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: UT16-TD68	TYPE:	WEIGHT:
SPEC.: black RA90 2700K+6000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	91	87	84
1.00	101	96	92	100	95	92	99	95	92	88
1.25	105	100	97	104	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	101	98	94
2.00	109	106	103	108	105	102	105	103	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	115	113	112	113	112	110	109	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: UT16-TD68	TYPE:	WEIGHT:
SPEC.: black RA90 2700K+6000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:

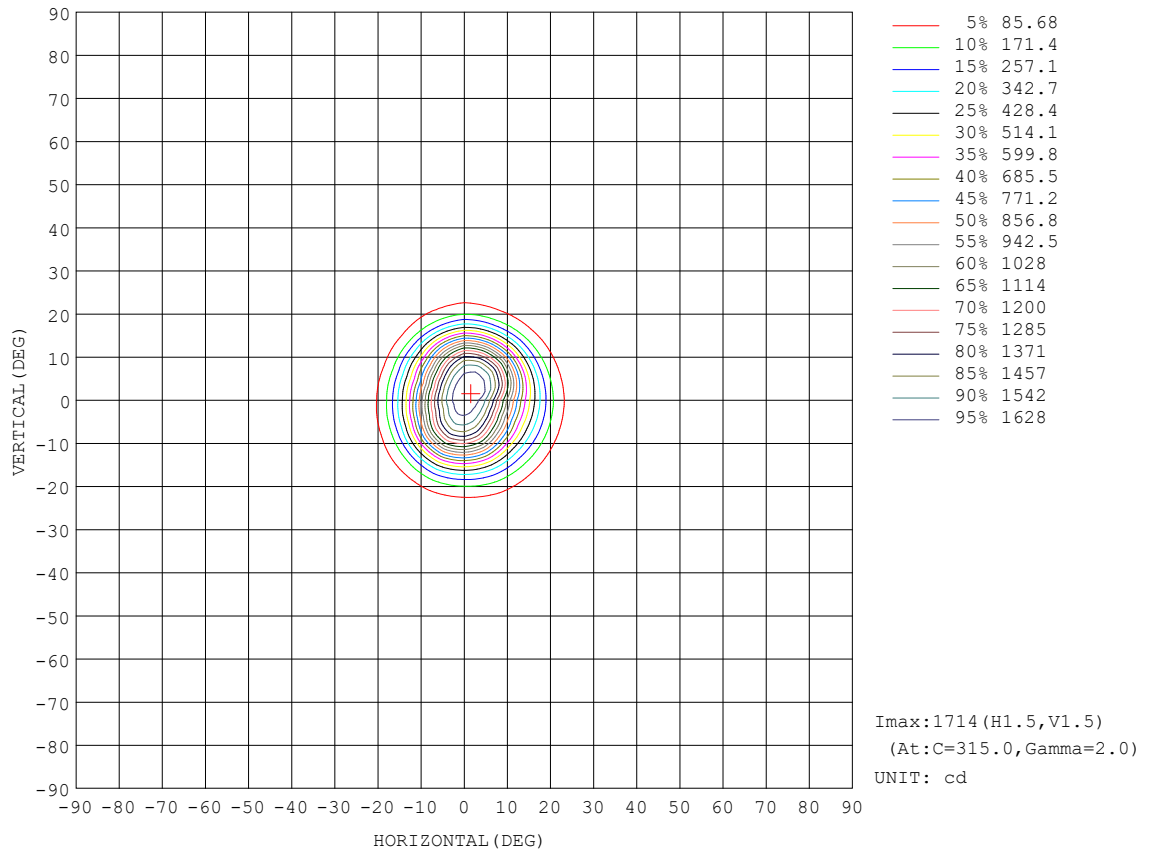


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: UT16-TD68	TYPE:	WEIGHT:
SPEC.: black RA90 2700K+6000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:

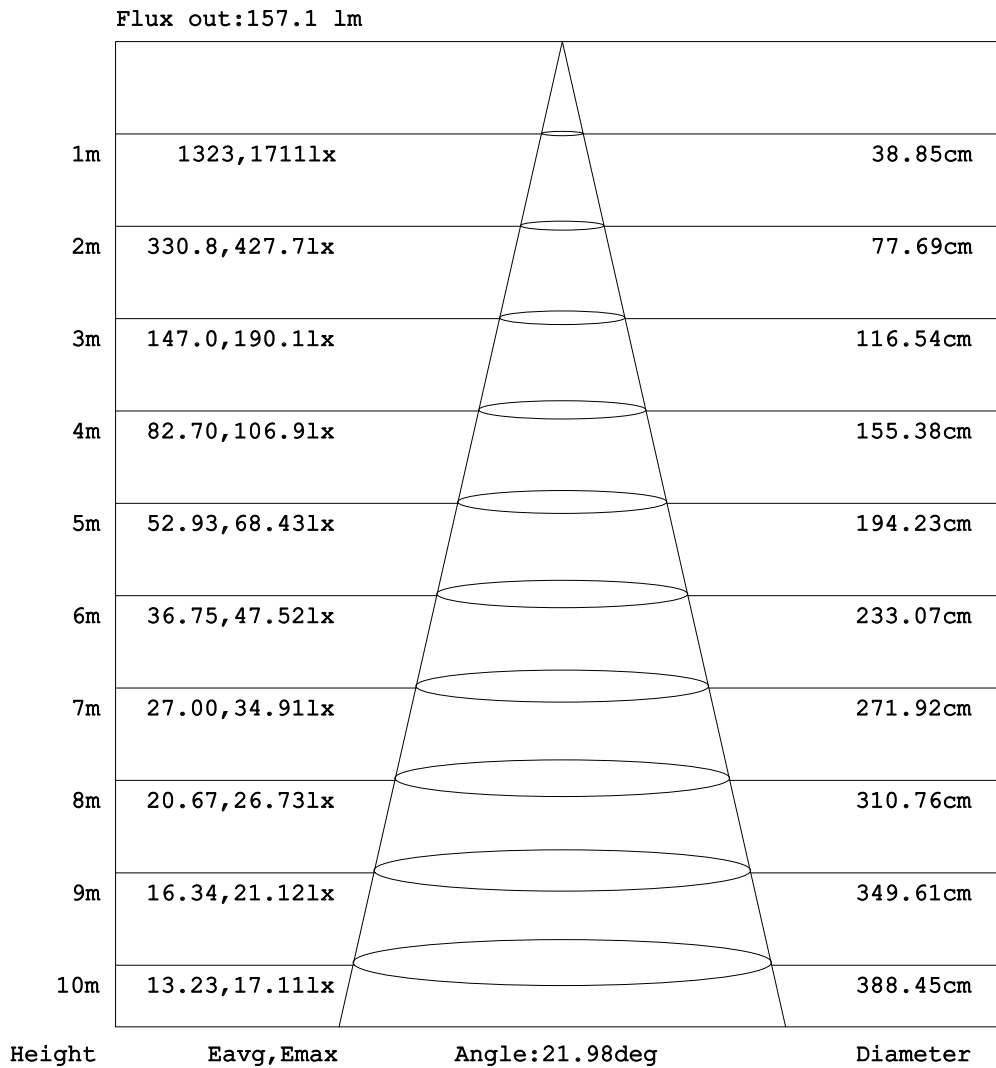


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: UT16-TD68	TYPE:	WEIGHT:
SPEC.: black RA90 2700K+6000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:

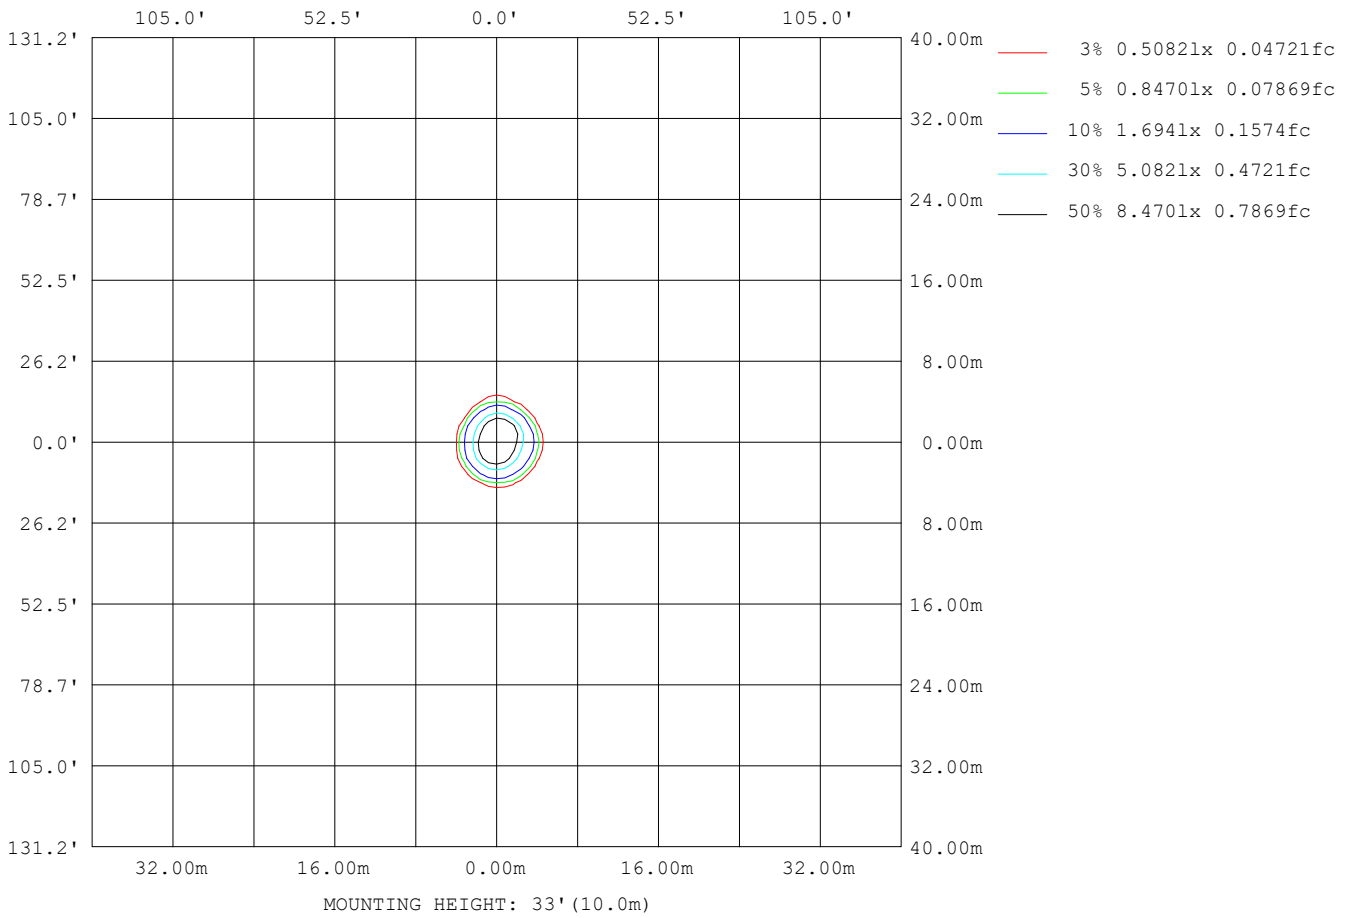

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: UT16-TD68	TYPE:	WEIGHT:
SPEC.: black RA90 2700K+6000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	91
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	94
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	90
L_45 (75) av	0
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

Planar Illuminance Curve

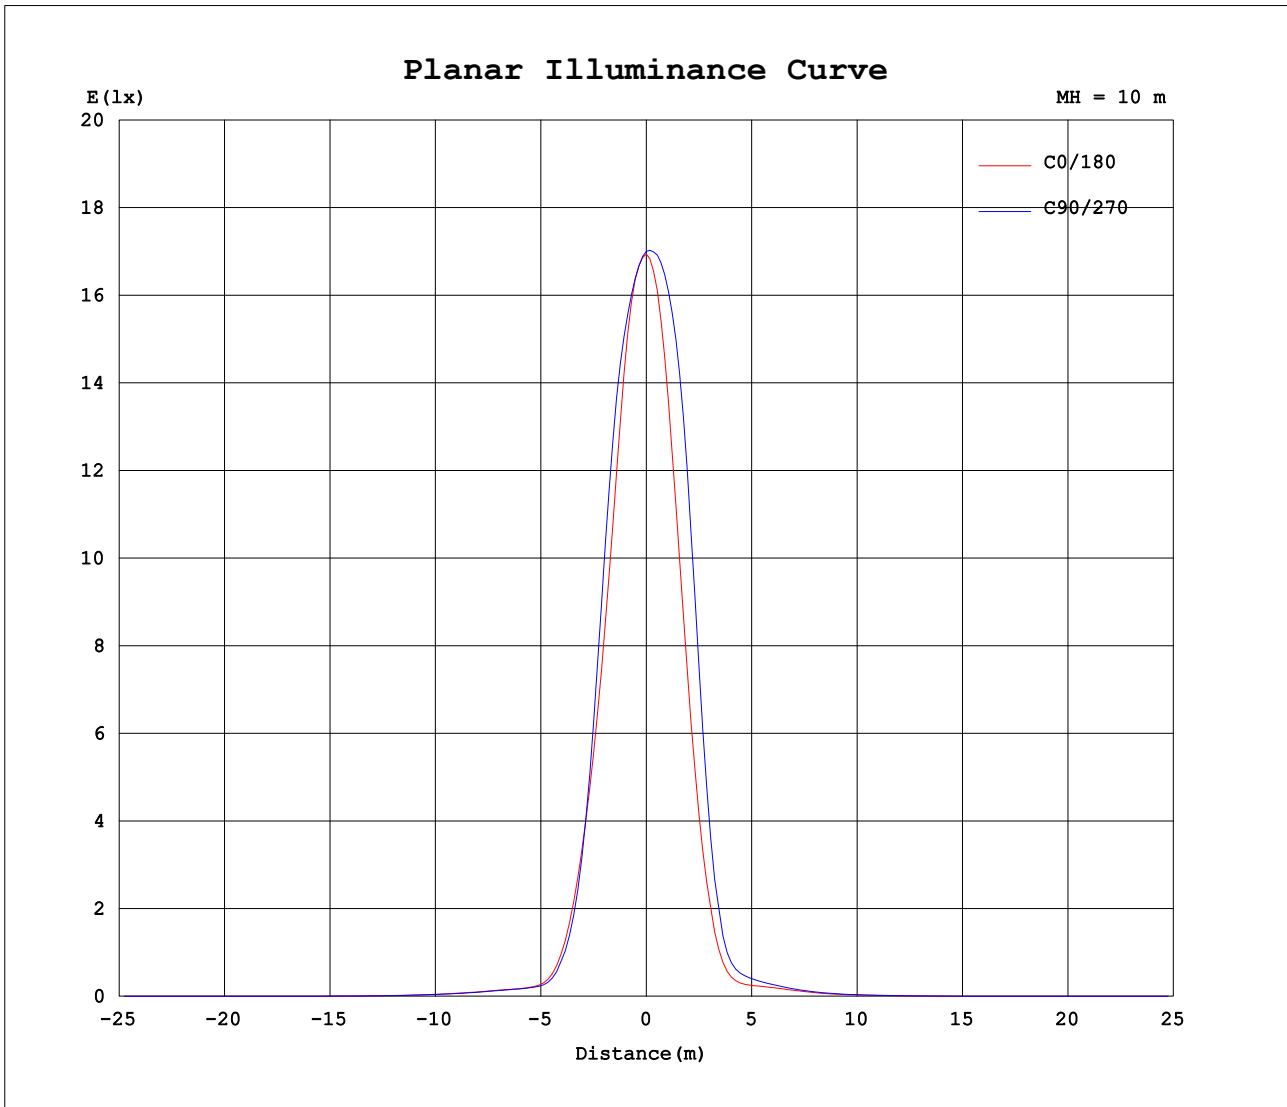

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.14V I:0.0655A P:5.8535W PF:0.3885 Freq:49.99Hz Lamp Flux:333.68x1 lm		
NAME: UT16-TD68	TYPE:	WEIGHT:
SPEC.: black RA90 2700K+6000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 63mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1694	1694	1696	1699	1700	1702	1701	1702	1694	1694	1696	1699	1700	1702	1701	1702			
5	1531	1506	1521	1559	1574	1577	1538	1477	1475	1480	1529	1601	1666	1688	1679	1640			
10	1005	967	1038	1158	1207	1222	1126	973	909	891	1009	1212	1383	1412	1378	1237			
15	528	496	504	554	563	569	502	410	371	375	442	568	679	692	688	615			
20	202	191	180	181	168	163	135	107	92.9	89.4	107	137	165	166	181	193			
25	52.4	45.6	44.6	49.8	43.2	41.3	39.2	40.9	37.1	32.2	35.6	53.7	63.4	51.9	47.3	50.3			
30	28.7	22.2	22.1	29.9	28.1	22.8	26.7	34.4	32.6	25.6	25.7	39.8	45.5	33.3	30.0	34.3			
35	25.6	17.8	18.0	25.7	24.1	18.0	20.9	26.4	24.9	18.0	17.3	28.1	30.8	21.9	21.9	29.2			
40	19.7	11.7	12.2	19.4	17.9	11.2	12.9	16.1	15.0	9.98	9.58	16.8	18.3	12.9	13.7	21.3			
45	12.9	7.95	8.40	13.1	12.1	7.65	8.32	9.16	8.52	6.01	6.02	9.68	10.4	7.90	8.78	13.2			
50	7.43	4.70	4.92	7.41	6.71	4.64	4.64	4.90	4.65	3.86	4.08	5.57	5.94	4.94	5.45	7.38			
55	3.16	2.18	2.20	3.08	2.86	2.19	2.06	1.97	1.78	1.69	1.88	2.31	2.53	2.30	2.55	3.11			
60	0.96	0.75	0.72	0.80	0.73	0.64	0.55	0.41	0.34	0.37	0.42	0.53	0.56	0.56	0.62	0.85			
65	0.18	0.12	0.16	0.12	0.15	0.10	0.12	0.05	0.06	0.10	0.09	0.14	0.10	0.14	0.10	0.17			
70	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02			
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-02-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks: